

BUBLIING R

TECHNICAL DATA SHEET OF THE MODEL





AT EVERY STEP, A SPACE WITHOUT LIMITS.

As the largest of all models, this BUBLIING redefines the limits of flexibility and mobility.


Its innovation provides freedom of movement by offering a space that adapts to various layouts.

- 👤 A space for 8 people.
- 🔊 Class A soundproofing.
- 📱 Guaranteed privacy and comfort.
- ⚡ Automatic ventilation and lighting.
- 📺 Integrated digital control.
- ♿ With an adapted version for PRM.

BUBLING R | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

Dimensions	Exterior: 3006x3006x2245 to 2261 mm / 118,33x118,33x88,39 to 98,00 in. Interior: 2708x2976x2114 mm / 106,61x117,24x83,27 in. Entrance height: 23 mm / 0,91 in. The door: 2134x949 mm / 83,90x37,36 in. Entrance area: 843 mm / 33,19 in.
Standard weight	930 kg / 2050 lb.
Acoustics	Class A $D_{B,A} > 30$ dB. Guaranteed speech level reduction according to the ISO 23351-1 test method, with one of the best ratings in the industry.
Fan airflow	Airflow: 1682,4m ³ /h (10 fans). The air is renewed, on average, every 5,6 minutes. In standby mode, the system runs for 10 minutes per hour. The airflow can be manually adjusted.
Lighting	Ceiling light: LED lighting with a color temperature of 3500K-4000K. Lighting is automatic and can be manually adjusted.
Presence indicators	Exterior LED sensor technology with red or green light.
Mobility	High-strength leveling feet adjustable from inside the cabin. The BUBLING is designed for people with reduced mobility and wheelchair users. Ramp with an entry height of 23 mm / 0,91 in.

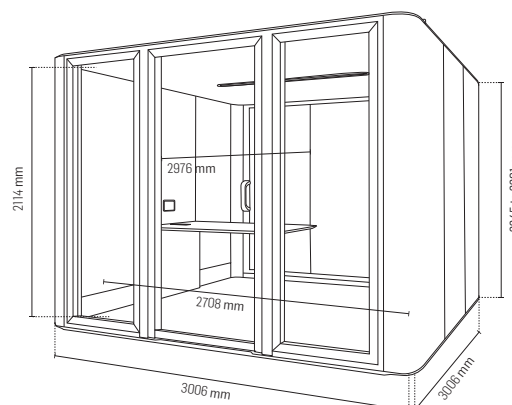

MATERIALS

Exterior	Exterior panels: Made of replaceable thermolacquered steel available in 10 colors. Frame and door: Made of matte black RAL 9005 lacquered aluminum, with invisible pivot hinge. Optional: The door can be configured to open to the left or to the right. Handle: Black. Glass: 8 mm / 0,31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Upholstery: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top coated with white thermolaminate, black anti-fingerprint, or wood imitation. Support structure in black metal.
Standard furniture	Table dimensions (8 people): 1800x1000x730 mm / 70,87x39,37x28,74 in. Table height can be 730 or 1050 mm / 28,74 or 41,34 in. Maximum load capacity for the table is 150 kg / 826,72 lb. Coat hooks (4): Black lacquered at 1900 mm / 78,80 in.
	Table dimensions (6 people): 1400x1000x730 mm / 55,12x39,37x28,74 in. Table height can be 730 or 1050 mm / 28,74 or 41,34 in. Maximum load capacity for the table is 150 kg / 826,72 lb. Coat hooks (4): Black lacquered at 1900 mm / 78,80 in.
PRM accessories	Support bar (1): Black, located on the door interior, at a height of 850 mm / 33,46 in. Protective plates (2): Black, for the door interior and exterior, 840x180 mm / 33,07x7,09 in. Coat hooks (4): Black lacquered at 1200 mm / 47,24 in.

Table for 8 people:


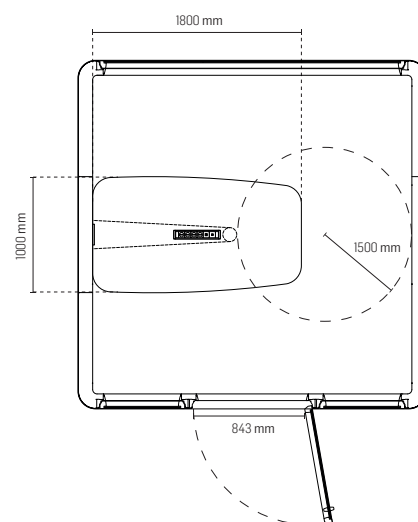


Table for 6 people:

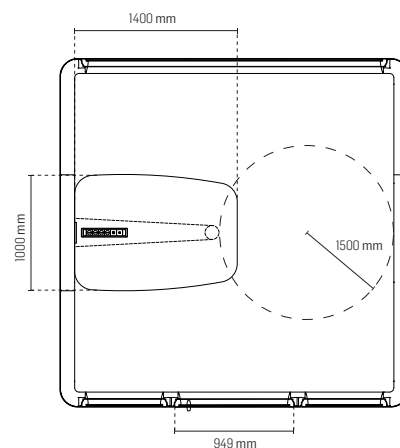

BUBLIING R | TECHNICAL SPECIFICATIONS

TOLERANCES

Manufacturing	The parts undergo dimensional quality control, with a permissible linear variation of $\pm 3/1000$ mm. This tolerance applies proportionally to the total length, allowing for minor cumulative deviations.
----------------------	---

FEATURES

Digital Control	7-inch integrated digital control screen. Displays the total lifetime usage of the BUBLIING and individual usage time.
Options	Door Closer: Metal hydraulic system for door closing. CO₂ and humidity sensor: Air quality information displayed on the Digital Control Screen. Interior metal monitor mount: With VESA mounting. Monitor not included. Monitor size: 13-42 in. Exterior metal monitor mount: With VESA mounting. Monitor not included. Monitor size: 37-70 in. White interior writing board: 1595 mmx910 / 62,80x35,83 in. White exterior writing board: 1595x910 mm / 62,80x35,83 in.

POWER


Electrical Equipment	4x Schuko sockets 220V-240V. 1x USB-C port 12W. 1x USB-A port 12W. 1x RJ45 network socket. Additional port: HDMI port.
Standard Consumption	176 W.
Standby Consumption	0,98 W.
Equipment Power	AC output (electric socket); 100-240 VAC, 16 A, 50-60 Hz.
Charger Output	12W USB-C output.

SAFETY

Fire Resistance	All upholstery, covering materials, and acoustic materials used in our products are tested and rated according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.
Seismic Resistance	The BUBLIING can be supplied with a system that allows floor anchoring, available for seismic regions.

SPACE AND INSTALLATION

Required Space	The width of the BUBLIING is 3006 mm / 118,33 in with the door opened at 100°, an additional 949 mm / 37,36 in should be considered. To ensure proper ventilation, a minimum clearance of 150 mm / 5,91 in is recommended above and on the sides.
Installation Space	Installation requires 500 mm / 19,69 in of clearance around the BUBLIING.
Leveling	The floor must not have a deviation greater than ± 8 mm / $\pm 0,31$ in.
Assembly	Estimated assembly time: ± 4 hours. Number of people: 3 persons.

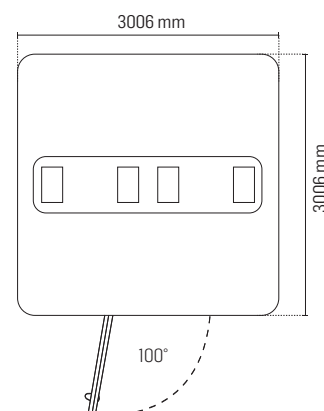

BUBLING R | STANDARD FURNITURE



LOW TABLE FOR 8 PEOPLE
1745x870x730 mm.
68,70x34,25x28,74 in.



COAT HOOKS
4 units at 1900 mm / 78,80 in.

BUBLING R | OPTIONAL FURNITURE



HIGH TABLE FOR 8 PEOPLE
1745x870x730 mm.
68,70x34,25x28,74 in.



COAT HOOKS
4 units at 1900 mm / 78,80 in.



LOW TABLE FOR 6 PEOPLE
1745x870x730 mm.
68,70x34,25x28,74 in.



COAT HOOKS
4 units at 1900 mm / 78,80 in.



HIGH TABLE FOR 6 PEOPLE
1745x870x730 mm.
68,70x34,25x28,74 in.



COAT HOOKS
4 units at 1900 mm / 78,80 in.

BUBLING R | STANDARD FEATURES



CONNECTIVITY

4x Schuko sockets 220V-240V.
1x USB-C port 12W.
1x USB-A port 12W.
1x RJ45 network socket 12W.



DIGITAL CONTROL SCREEN

7-inch integrated.



PRESENCE INDICATORS

LED in red or green light.
2 units.

BUBLING R | OPTIONAL FEATURES



DOOR CLOSER

Metal hydraulic system for door closing.



CO₂ AND HUMIDITY SENSOR

Air quality information on the Digital Control Screen.



INTERIOR MONITOR MOUNT

Monitor not included.
Size: 13-42 in.



EXTERIOR MONITOR MOUNT

Monitor not included.
Size: 37-70 in.



INTERIOR WRITING BOARD

1594x910 mm.
62,80x35,83 in.



EXTERIOR WRITING BOARD

1594x910 mm.
62,80x35,83 in.

BUBLING R | PRM ACCESSORIES




PROTECTIVE PLATES

840x180mm.
33,07x7,09 in.



SUPPORT BAR

With a height of 850 mm / 33,46 in.



COAT HOOKS AT PRM HEIGHT

4 units at 1200 mm / 47,24 in.



BUBLIING R | FINISHES





INTERIOR FINISH

 Beige CSE01	 Light Blue CSE38
 Light Grey CSE41	 Navy Blue CSE40
 Charcoal Grey CSE13	 Coral Red CSE24
 Brown Beige CSE02	 Classic Red CSE29
 Tea Green CSE33	 Yellow CSE03
 Olive Green CSE34	 Mustard CSE31




EXTERIOR COATING

 White RAL 9003 MATE	 Dark Blue RAL 5001 MATE
 Light Grey RAL 9002 MATE	 Light Blue RAL 5014 MATE
 Dark Grey RAL 7039 MATE	 Dark Green RAL 6028 MATE
 Black RAL 9005 MATE	 Light Green RAL 6021 MATE
 Beige RAL 1001 MATE	 Red Beige RAL 3012 MATE

INTERIOR FLOORING

 Beige 393100
 Brown 327260
 Dark grey 393350
 Light Grey 393300

TABLETOP

 Plywood with white laminated	 Plywood with anti-fingerprint black laminated	 Plywood with oak laminated
---	---	---

Due to different monitor and printer settings, the appearance of finishes may vary slightly from the actual finish. To ensure the selected finishes meet your expectations, please consult physical samples or contact a BUBLIING representative.

WORK WELL, LIVE BETTER
WITH **BUBLING R**



