


# BUBLIING Stwin

TECHNICAL SPECIFICATIONS



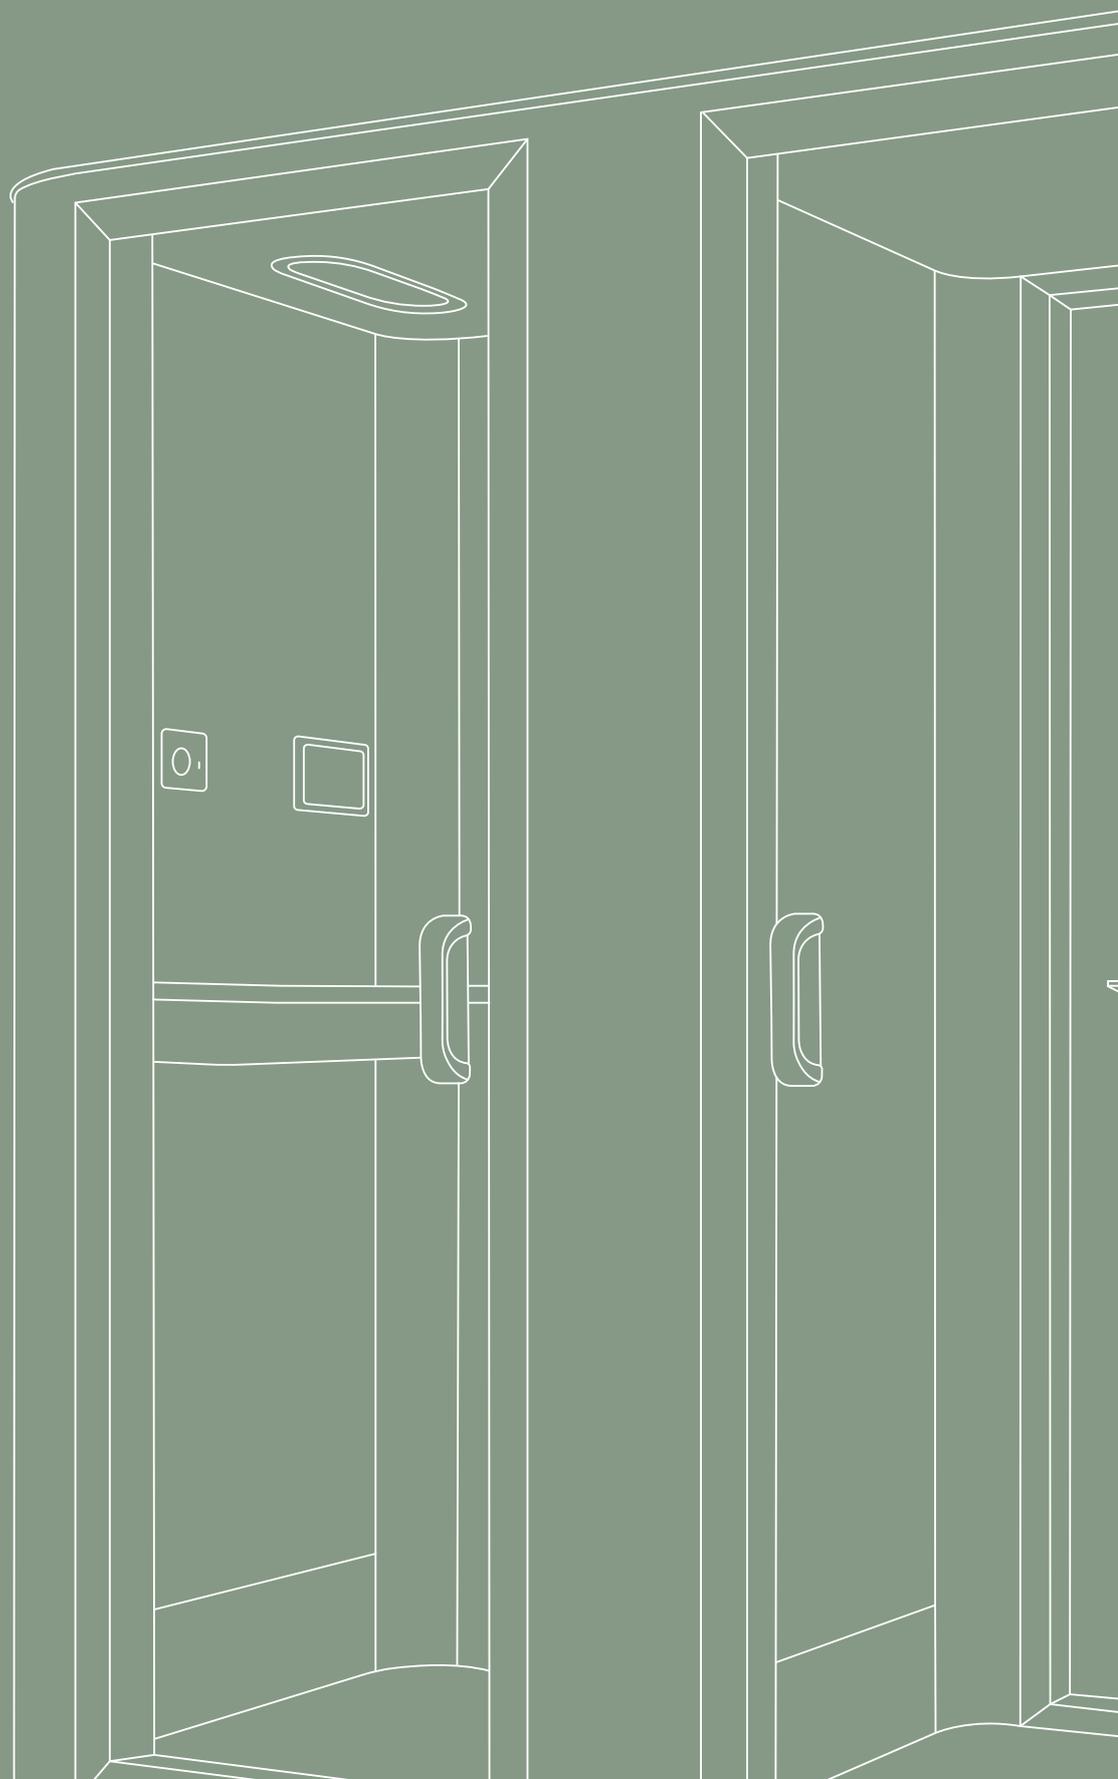

## Twice the privacy, the same efficiency.


Combines two BUBLING's, allowing two people to use it simultaneously and individually, carrying out tasks without compromising privacy while optimizing space.

-  Twin space for individual use.
-  Class A soundproofing.
-  Guaranteed privacy and comfort.
-  Automatic ventilation and lighting.

## BUBLIING Stwin | TECHNICAL SPECIFICATIONS

### GENERAL DESCRIPTION


<b>Dimensions</b>	<p>Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in.          With castors: + 52 mm / 2,05 in.          With Bubliing Fresh Air: +50 mm / 1,97 in.          Interior: 778x974x2060 mm / 30,63x38,35x81,10 in.          Entry Height: 86 mm / 3,39 in ; <b>With castors:</b> 138 mm / 5,43 in.          Door: 2108x689 mm / 82,99x27,13 in.</p>
<b>Standard weight</b>	590 kg / 1300 lb.
<b>Acoustics</b>	<p>Class A   dB,A &gt;30 dB.          Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.</p>
<b>Sound output</b>	<p>Sound impact produced by the ventilation system.          Interior: 36 dB at head height.          Exterior: 25 dB at a distance of 1 meter.          Test conducted according to ISO 11201:2010.</p>
<b>Fan flow rate</b>	<p><b>Airflow:</b> 560,8 m<sup>3</sup>/h (4 fans).          Air is renewed, on average, every 5.6 minutes.          Airflow can be manually adjusted.          In standby mode, the system activates for 10 minutes per hour.</p>
<b>Lighting</b>	<p><b>Ceiling Light:</b> LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk.  <b>Face Light:</b> LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the user's face.          Lighting is automatic and can be manually adjusted.</p>
<b>Occupancy indicators</b>	LED sensor technology with exterior red or green light.
<b>Digital control</b>	7" touchscreen digital control panel.
<b>Mobility</b>	<p>High-resistance leveling feet adjustable from inside the booth.          BUBLIING is prepared for the installation of castors (optional).          The leveling feet must be raised to move the booth and lowered once it is in the desired position.</p>

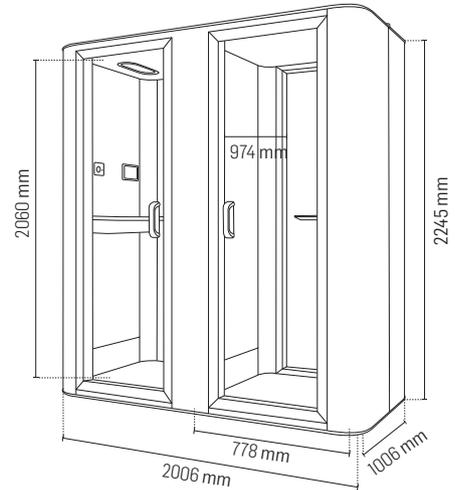


### MATERIALS

<b>Exterior</b>	<p><b>Exterior panels:</b> Made of powder-coated steel, available in 10 interchangeable colors.  <b>Frame and door:</b> Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge.  <b>Handle:</b> Made of textured black polymer.  <b>Glass:</b> 8 mm / 0.31 in clear acoustic glass.</p>
<b>Interior</b>	<p><b>Structure:</b> Metal frame, wood, and recycled acoustic foam.  <b>Covering:</b> 100% polyester fabric available in 12 colors.  <b>Flooring:</b> 100% polyamide carpet available in 4 colors.  <b>Table:</b> Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish.          Metal support structure.</p>
<b>Standard furniture</b>	<p><b>Table Dimensions:</b> 730x350x1050 mm / 28,74x13,78x41,34 in.  <b>Table Height:</b> 1050 mm / 41,34 in.          Maximum load for the table is 50 kg / 110.23 lbs.  <b>Clothes hanger (I):</b> lacquered in textured black RAL 9005.</p>
<b>Furniture options</b>	<p><b>High stool:</b> 570x145x760 mm / 22,44x5,71x29,92 in.  <b>Backrest:</b> 400x400x580-780 mm / 15,75x15,75x22,83-30,71 in.          These optional pieces are upholstered in 100% polyester fabric, available in 12 colors.          Maximum load for the seat is 135 kg / 297.12 lbs.</p>

With high stool:

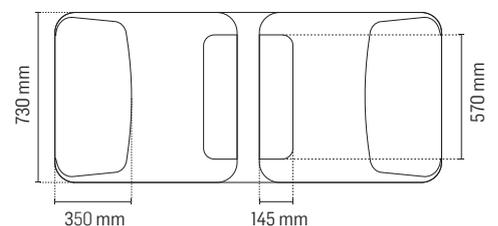

With backrest:

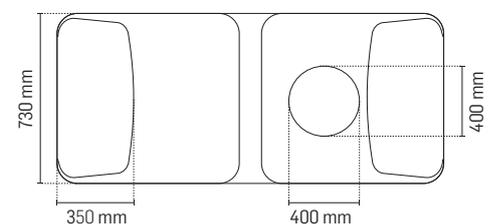

## BUBLIING Stwin | TECHNICAL SPECIFICATIONS

### SAFETY

---

<b>Fire protection</b>	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.  Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cf1 – s1. Wood: EN 13986, Class D-s2, d0.
<b>Seismic protection</b>	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

### ENERGY

---

<b>Charger output</b>	In each booth. 1x Schuko socket – 230 V. 1x USB-C port. Optional: USB-A port, RJ45 network socket.
<b>Equipment power</b>	60 W.
<b>Standby consumption</b>	0,98 W.
<b>Standard consumption</b>	AC output (power socket); 100–240 VAC, 16 A, 50–60 Hz.
<b>Electrical equipment</b>	18 W USB-C output.

### EXTRA FEATURES


---

<b>Options</b>	Metal hydraulic air spring for door closer. Invisible wireless charger integrated into the table. High load capacity castors. Castors and leveling feet are adjustable from inside the BUBLIING. Adjustable facial light up to 500 lux directed at the user's face. Bubliing Fresh Air system, non-adjustable and noise-free. Height-adjustable lift table system, from 730 to 1200 mm / 28.74 x 47.24 in.
----------------	---

### SPACE AND INSTALLATION

---


<b>Required Space</b>	BUBLIING depth 1006 mm / 39.61 in + 100° door opening. Minimum recommended clearance for air circulation above and on the sides 150 mm / 5.91 in.
<b>Installation Space</b>	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
<b>Assembly</b>	Assembly time: 1 hour. Number of people: 2 people.

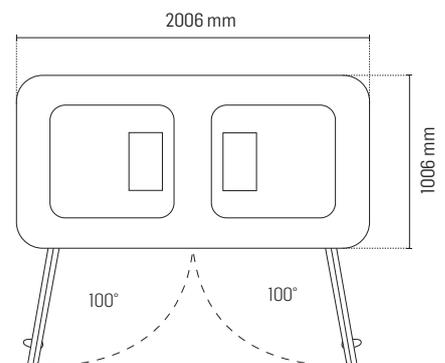

## BUBLING Stwin | STANDARD FURNITURE





**HIGH TABLE**  
730x350x1050 mm.  
28,74x13,78x41,34 in.

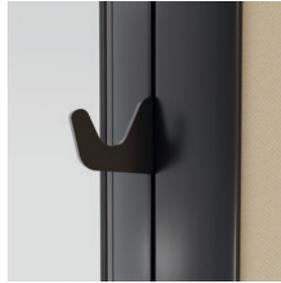

**CLOTHES HANGER**  
1 unit in each space.

## BUBLING Stwin | OPTIONAL FURNITURE

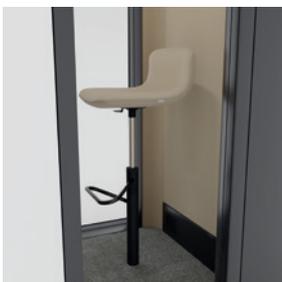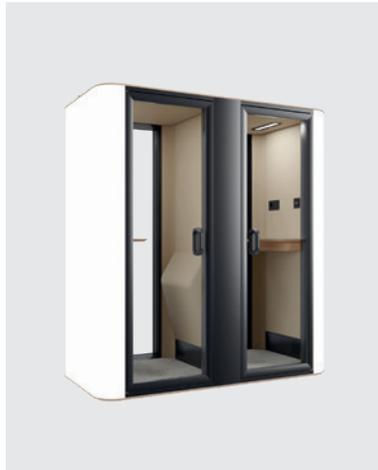

**HIGH STOOL**  
400x00x580-780 mm.  
15,75x15,75x22,83-30,71 in.



**BACKREST**  
570x145x760 mm.  
22,44x5,71x29,92 in.

## BUBLIING Stwin | STANDARD FEATURES



### CONNECTIVITY

1x standard Schuko socket - 230 V.  
1x USB-C port.



### CONTROL SCREEN

7-inch digital control.



### OCCUPANCY INDICATOR

Exterior LED sensor technology.  
2 units.

## BUBLIING Stwin | OPTIONAL FEATURES



### CASTERS

High load capacity.  
Adjustment is made from the inside.



### AIR SPRING

Metal hydraulic system for the door.




### FACIAL LIGHT

LED lighting 3500 K - 4000 K.  
Up to 500 lux on the user's face.



### WIRELESS CHARGER

Invisible charger built into the table.

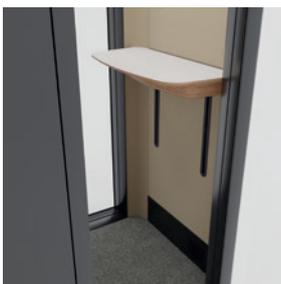


### LIFTING TABLE

Height adjustable system:  
730-1200 mm / 28.74x47.24 in.



### BUBLIING FRESH AIR

Non-adjustable system.  
Noise-free.

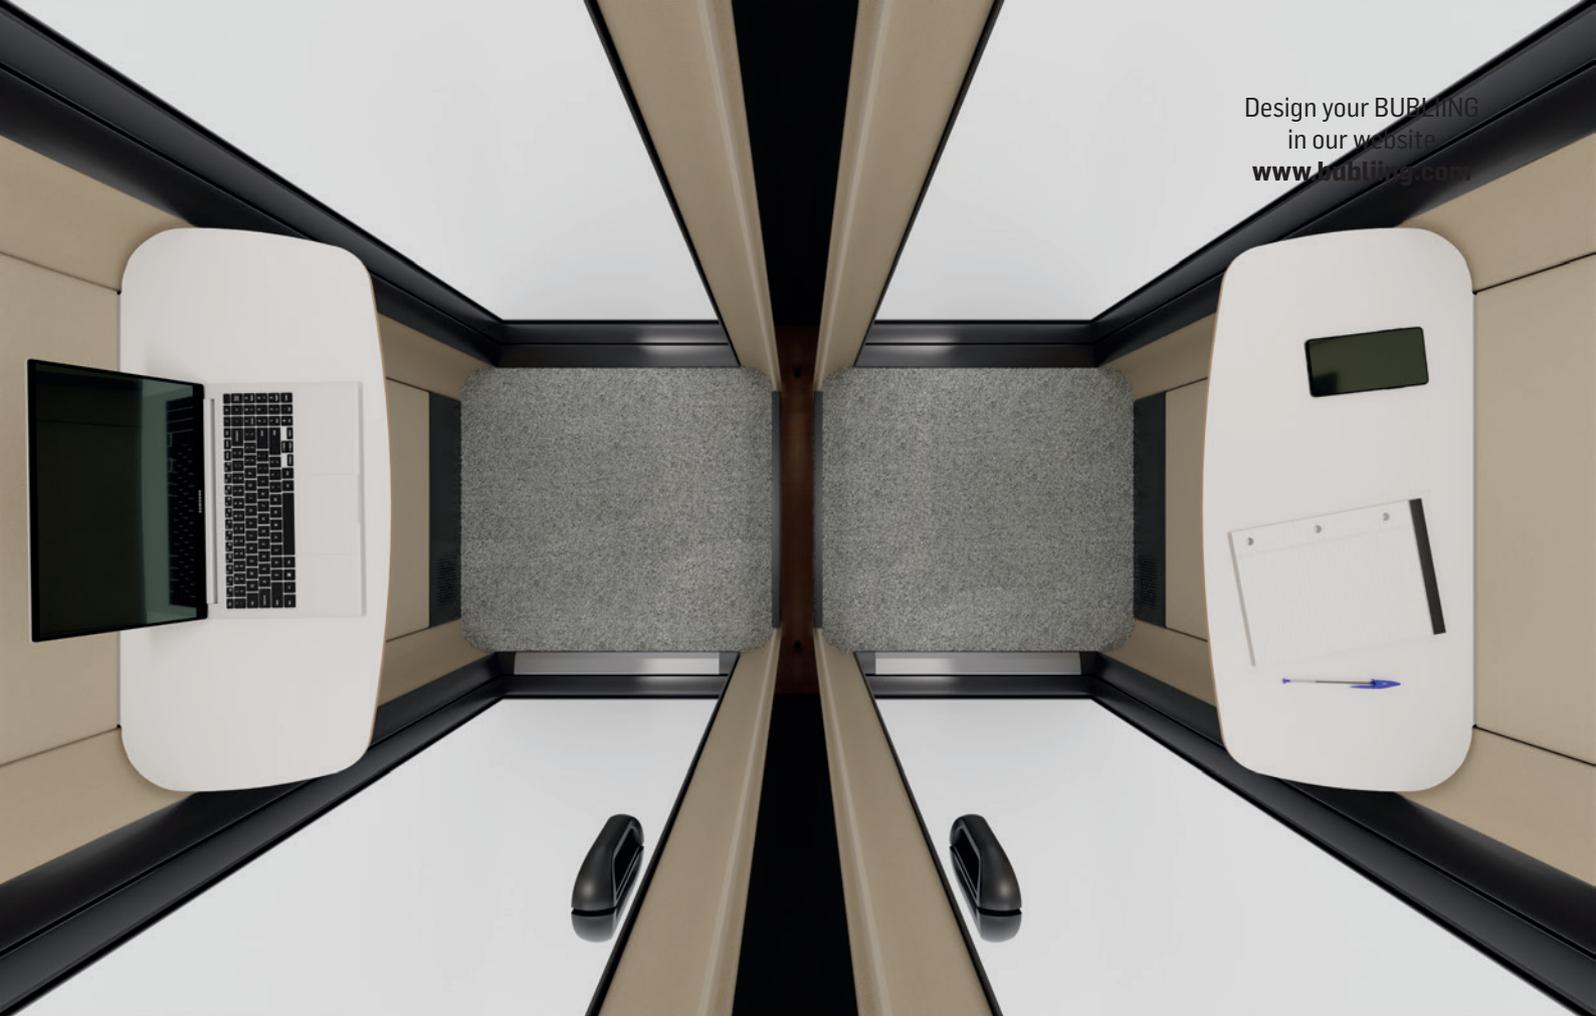


## BUBLIING Stwin | FINISHES


### INTERIOR FINISH

 Beige CSE01	 Light Blue CSE38
 Light Grey CSE41	 Navy Blue CSE40
 Charcoal Grey CSE13	 Coral Red CSE24
 Brown Beige CSE02	 Classic Red CSE29
 Tea Green CSE33	 Yellow CSE03
 Olive Green CSE34	 Mustard CSE31


### EXTERIOR COATING

 White RAL 9003 MATE	 Dark Blue RAL 5001 MATE
 Light Grey RAL 9002 MATE	 Light Blue RAL 5014 MATE
 Dark Grey RAL 7039 MATE	 Dark Green RAL 6028 MATE
 Black RAL 9005 MATE	 Light Green RAL 6021 MATE
 Red Beige RAL 3012 MATE	 Beige RAL 1001 MATE

### INTERIOR FLOORING

 Beige 393100
 Brown 327260
 Dark grey 393350
 Light Grey 393300

### TABLE TOP

 Plywood with white laminated	 Plywood with anti-fingerprint black laminated	 Plywood with oak laminated
---	---	---

Due to the different monitor and printer configurations, the appearance of the finishes may vary from the actual finish. To ensure that the chosen finishes meet your expectations, please refer to physical samples or contact a BUBLIING representative.

WORK WELL, LIVE BETTER  
WITH **BUBLING** StwIn

[WWW.BUBLING.COM](http://WWW.BUBLING.COM)