

BUBLIING M






TECHNICAL DATA SHEET OF THE MODEL





FLEXIBILITY, AT ITS CORE.

By offering solutions for the most diverse needs, this model is the most flexible. Ideal for small meetings between two people or to have a complete workspace entirely at your disposal.

-  A space for 2 people.
-  Class A soundproofing.
-  Guaranteed privacy and comfort.
-  Automatic ventilation and lighting.
-  Integrated digital control.

BUBLIING M | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

Dimensions

Exterior: 2006x1006x2245 to 2261 mm / 78,98x39,61x88,39 to 89,00 in.
With casters: + 52 mm / 2,05 in.
With Bubliing Fresh Air: + 50 mm / 1,97 in.
Interior: 1708x974x2060 mm / 67,24x38,35x81,10 in.
Entrance height: 86 mm / 3,39 in.
With casters: 138 mm / 5,43 in.
The door: 2108x774 mm / 82,99x30,47 in.
Entrance area: 668 mm / 26,30 in.

Standard weight

510 kg / 1124 lb.

Acoustics

Class A | $D_{B,A} > 30$ dB.
Guaranteed speech level reduction according to the ISO 23351-1 test method, with one of the best ratings in the industry.

Fan airflow

Airflow: 560,8 m³/h (2 fans).
The air is renewed, on average, every 5,6 minutes.
In standby mode, the system runs for 10 minutes per hour.
The airflow can be manually adjusted.

Lighting


Ceiling light: LED lighting with a color temperature of 3500K-4000K.
Lighting is automatic and can be manually adjusted.

Presence indicators

Exterior LED sensor technology with red or green light.

Mobility

High-strength adjustable leveling feet inside the cabin.
Move the BUBLIING without disassembly by adding casters (optional).
Retract the leveling feet for movement and lower them again when in the final position.

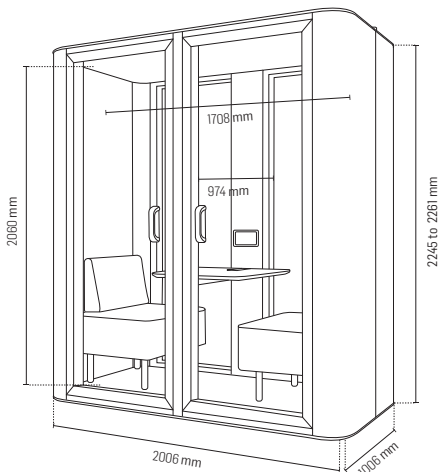

MATERIALS

Exterior

Exterior panels: Made of replaceable thermolacquered steel available in 10 colors.
Frame and door: Made of matte black RAL 9005 lacquered aluminum, with invisible pivot hinge.
Handle: Black.
Glass: 8 mm / 0,31 in clear acoustic glass.

Interior


Structure: Metal frame, wood, and recycled acoustic foam.
Upholstery: 100% polyester fabric available in 12 colors.
Flooring: 100% polyamide carpet available in 4 colors.
Table: Birch plywood top coated with white thermolamine, black anti-fingerprint, or wood imitation.
Support structure in black metal.

Standard furniture

Table dimensions: 745x700x730 mm / 29,33x27,56x28,74 in.
Table height can be 730 or 1050 mm / 28,74 or 41,34 in.
Maximum load for the table is 90kg / 198,42 lb.
Sofa dimensions (2): 730x610x450 mm / 28,74x24,02x17,72 in.
Sofa upholstered in 100% polyester fabric available in 12 colors.
Maximum load capacity for the seat is 135 kg / 297,12 lb.
Coat hooks (2): Black lacquered, at 1900 mm / 78,80 in.

Optional furniture

Sofa cushion: 500x300 mm / 19,69x11,81 in upholstered in 100% polyester fabric available in 12 colors.

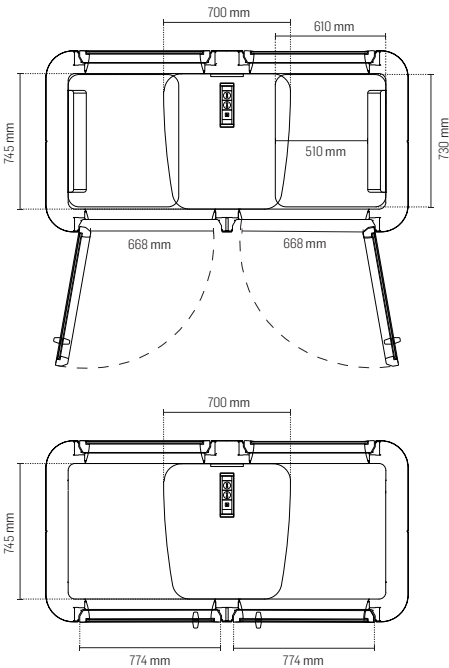

TOLERANCES

Manufacturing

The parts undergo dimensional quality control, with a permissible linear variation of $\pm 3/1000$ mm. This tolerance applies proportionally to the total length, allowing for minor cumulative deviations.

BUBLIING M | TECHNICAL SPECIFICATIONS

FEATURES

Digital Control	7-inch integrated digital control screen. Displays the total lifetime usage of the BUBLIING and individual usage time.
Options	Door Closer: Metal hydraulic system for door closing. Casters: High load capacity. Adjustment of casters and leveling feet is done from inside the BUBLIING. Bubliing Fresh Air: Non-adjustable and noise-free system. CO₂ and humidity sensor: Air quality information displayed on the Digital Control Screen. Interior metal monitor mount: With VESA mounting. Monitor not included. Monitor size: 13-42 in.

POWER


Electrical Equipment	2x Schuko sockets 220V-240V. 1x USB-C port 12W. 1x USB-A port 12W. Additional ports: RJ45 Network Socket; HDMI port.
Standard Consumption	60 W.
Standby Consumption	0,74 W.
Equipment Power	AC output (electric socket); 100-240 VAC, 16 A, 50-60 Hz.
Charger Output	12W USB-C output.

SAFETY

Fire Resistance	All upholstery, covering materials, and acoustic materials used in our products are tested and rated according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.
Seismic Resistance	The BUBLIING can be supplied with a system that allows floor anchoring, available for seismic regions.

SPACE AND INSTALLATION

Required Space	The width of the BUBLIING is 1006 mm / 39,61 in, with the door opened at 100°, an additional 774 mm / 30,47 in should be considered. To ensure proper ventilation, a minimum clearance of 150 mm / 5,91 in, is recommended above and on the sides.
Installation Space	Installation requires 500 mm / 19,69 in of clearance around the BUBLIING.
Leveling	The floor must not have a deviation greater than ± 8 mm / ± 0.31 in.
Assembly	Estimated assembly time: ± 1 hour. Number of people: 2 persons.

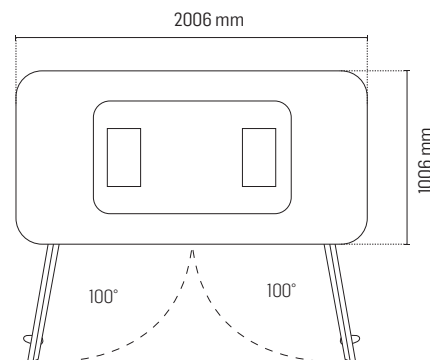

BUBLING M | STANDARD FURNITURE



LOW TABLE

745x700x730 mm.
29,33x27,56x28,74 in.



SOFA FOR 1 PERSON

730x570x450 mm.
28,74x22,44x17,72 in.



COAT HOOKS

2 units at 1900 mm / 78,80 in.

BUBLING M | OPTIONAL FURNITURE



HIGH TABLE

745x700x1050 mm.
29,33x27,56x41,34 in.



SOFA CUSHION

500x300 mm.
19,69x11,81 in.

BUBLIING M | STANDARD FEATURES



CONNECTIVITY

2x Schuko sockets 220V-240V.
1x USB-C port 12W.
1x USB-A port 12W.



DIGITAL CONTROL SCREEN

7-inch integrated.



PRESENCE INDICATORS

LED in red or green light.
2 units.

BUBLIING M | OPTIONAL FEATURES



CASTERS

High load capacity.
Adjustment is done from the inside.



DOOR CLOSER

Metal hydraulic system for door closing.



BUBLIING FRESH AIR

Non-adjustable and noise-free system.



CO₂ AND HUMIDITY SENSOR

Air quality information on the Digital Control Screen.



INTERIOR MONITOR MOUNT

Monitor not included.
Size: 13-42 in.



BUBLIING M | FINISHES





INTERIOR FINISH

 Beige CSE01	 Light Blue CSE38
 Light Grey CSE41	 Navy Blue CSE40
 Charcoal Grey CSE13	 Coral Red CSE24
 Brown Beige CSE02	 Classic Red CSE29
 Tea Green CSE33	 Yellow CSE03
 Olive Green CSE34	 Mustard CSE31




EXTERIOR COATING

 White RAL 9003 MATE	 Dark Blue RAL 5001 MATE
 Light Grey RAL 9002 MATE	 Light Blue RAL 5014 MATE
 Dark Grey RAL 7039 MATE	 Dark Green RAL 6028 MATE
 Black RAL 9005 MATE	 Light Green RAL 6021 MATE
 Beige RAL 1001 MATE	 Red Beige RAL 3012 MATE

INTERIOR FLOORING

 Beige 393100
 Brown 327260
 Dark grey 393350
 Light Grey 393300

TABLETOP

 Plywood with white laminated	 Plywood with anti-fingerprint black laminated	 Plywood with oak laminated
---	---	---

Due to different monitor and printer settings, the appearance of finishes may vary slightly from the actual finish. To ensure the selected finishes meet your expectations, please consult physical samples or contact a BUBLIING representative.

WORK WELL, LIVE BETTER
WITH **BUBLING M**



WORK WELL, LIVE BETTER
WITH **BUBLING M**